

PAPIFEED

User Manual

Smart Pet Feeder with Camera (2.4G/5G WiFi)

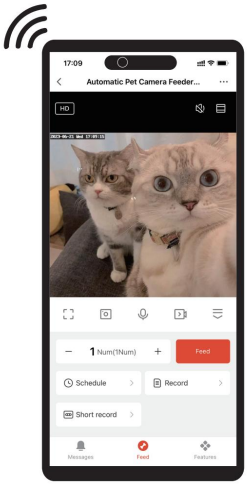

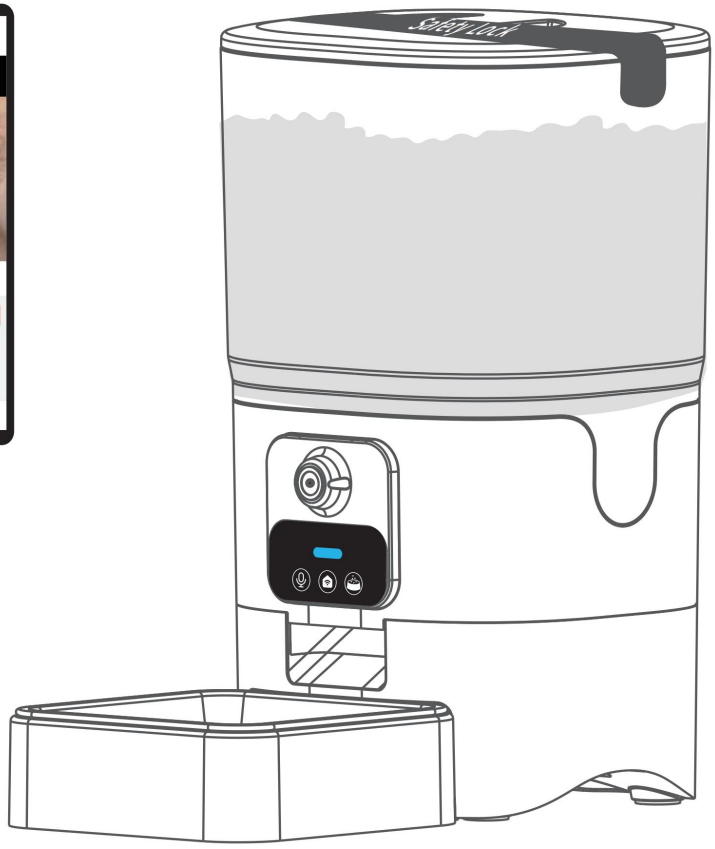

Products will be upgraded from time to time (including APP), please refer to the actual product!

Safety Instructions



Dispose of all packaging materials properly. Some items may be packed in plastic bags; these bags could cause suffocation. Keep them away from children and pets.



Do not immerse the base part in water at any time as it may damage electronic components like the control panel.



Suggest following the instruction in this user manual to assemble or disassemble the feeder.



Only use accessories recommended or sold by the manufacturer. The use of accessories not recommend-ed or sold by the manufacturer may cause an unsafe condition.



Examine the feeder after installation. Do not plug in if there is water on the power cable or plug.



This product uses 4 AA batteries as a backup power supply. Please use double power supply to ensure the normal use of the product.



Check the batteries regularly. Before leaving for an extended period of time, always replace batteries with new ones.



Do not put your fingers into the food outlet or let your fingers touch the rotor.



Keep the feeder close to your router, make sure the network signal is good, and it is ideal to make it within 5 meters without obstacles and walls(Depending on the coverage of the router you are using).



Please do not use wet, canned or moist food; only put dry food into the food tank prevent from abnormal conditions even may including pet safety problems.

Warranty

◆**1-Year Warranty**

◆**Lifetime Support**

For guidance on product use and warranty extension, please contact our brand after-sales staff via email: **[service@papifeed.cn]** or call us at **(1) 877-290-0617** (From Monday to Friday: 8 a.m.-5 p.m.)(PST) lf any questions related to orders, please contact the seller through the shopping platform.


Specifications

Product Name	Smart Pet Feeder with Camera（2.4G/5G WiFi）
Suit For	Cat, Dog, Rabbit, Squirrel, Small Pets
Power	DC 5V Power Adapter，4 AA Batteries (not included)
Power Adapter	AC 100-240V Input, DC 5V Output
Rated Power	5W
Material	Eco-Friendly ABS
Product Sizs	192*303*338mm/7.6*12*13.5in
Product Weight	1.6Kg/3.53lb
Product Capacity	6L/25Cup
Pet Food	Dry Food
Portion Size	About 15g/0.03lb One Portion (Varies due to density of pet food)
Camera	1080P HD Night Vision Camera with Wide Angle

In the Box




Safety Lock*1

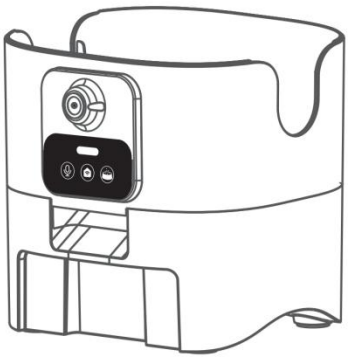


Feeder Base*1



Lid*1

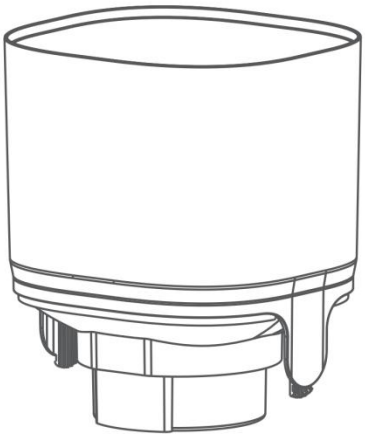


Food Tank*1



Stainless Steel
Feeding Bowl*1



Bowl Tray*1



Power
Adapter*1



Desiccant*1



USB Cable*1




Desiccant
Compartment*1



User Manual*1

Product Overview


1	Safety Lock
2	Lid
3	Desiccant
4	Desiccant Compartment
5	Food Tank
6	Camera
7	Control Panel
8	Food Outlet
9	Stainless Steel Feeding Bowl
10	Bowl Tray

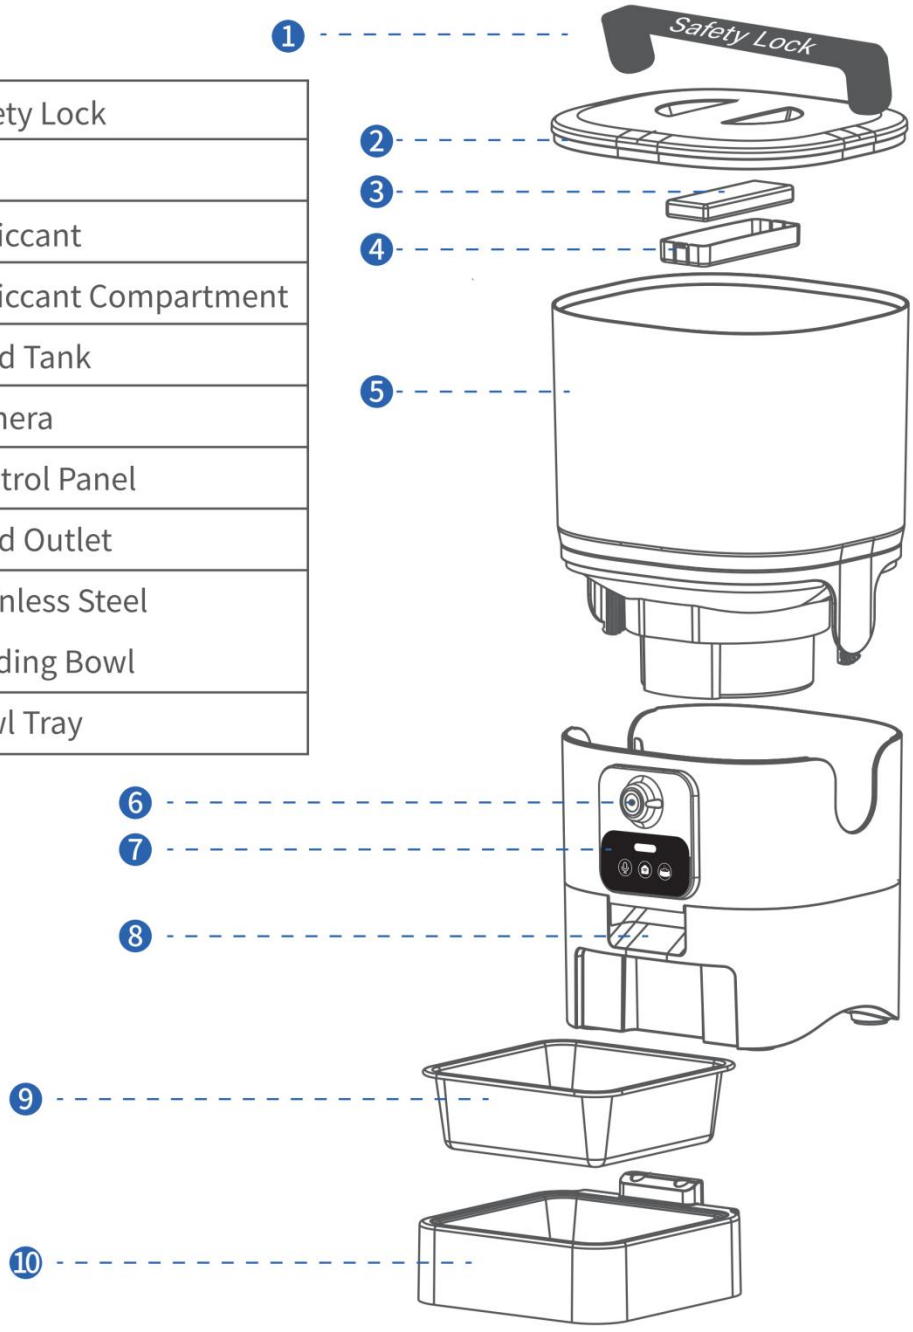

Installation


Step 1 Connecting Power

1



● Insert the 5V power adapter into the socket, plug in power cable of the feeder.

2

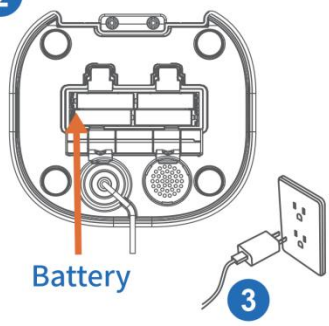


● Open the battery compartment at the bottom of the unit. Install 4 AA batteries (Not Included) in case of home outage (Dual power supplies are recommended for simultaneous use).

4



● When the indicator light is on, it means that the device has been on.


5

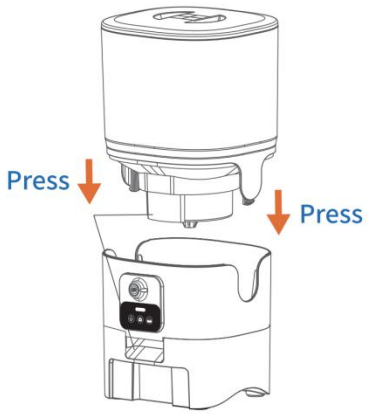

● When installing the food tank, please assemble and follow the instruction as shown in.

● Food inlet should be the same direction as the dispensing outlet .


6

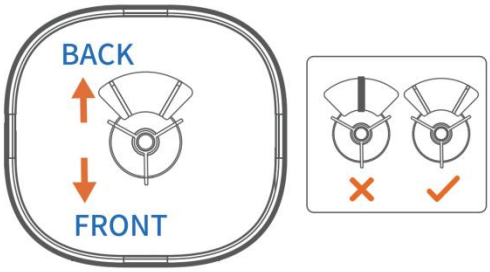


● Please pay attention to the impeller direction

Step 2 Filling Food Tank

7

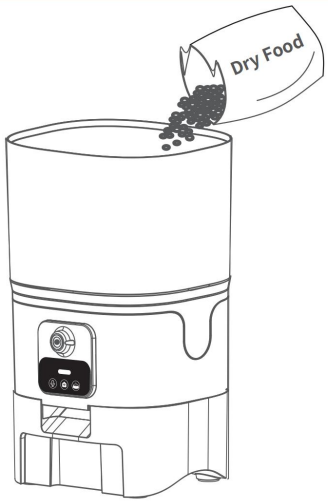

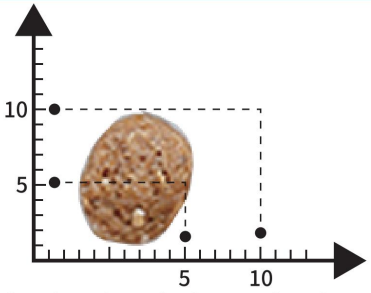


● Fill food tank with dry pet food.

▲Note:
1. Please fill food tank with dry pet food, and do not use canned, wet or moist pet food.
2. Recommend kibble size ranging from 5-10mm/0.12-0.4in in diameter.

Step 3 Assembling the Food Tray

8

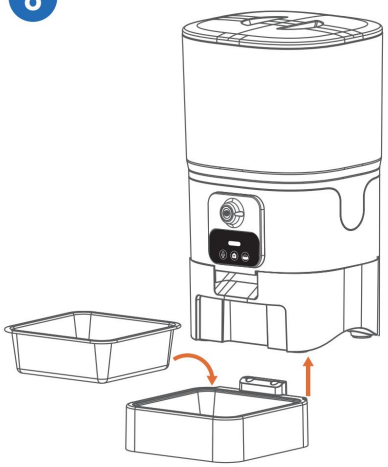

● Align the bulging of the food tray and holes in the base, and push upward to connect the two.


● Put on the stainless steel feeding bowl.

9



● Close the lid and lock the safety lock.

Buttons

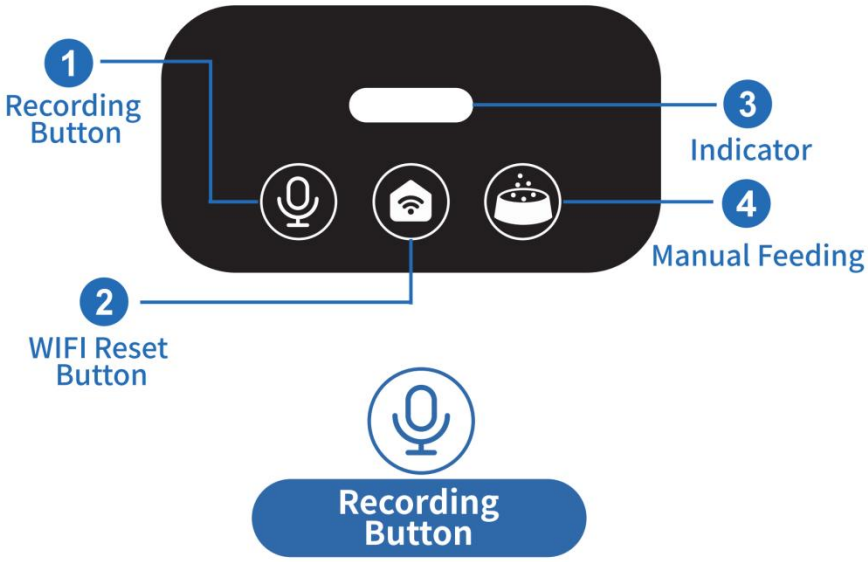


Recording



Check the Recordings



▲Note:
Recordings cannot be deleted directly, but new recordings can be made directly to overwrite old one.

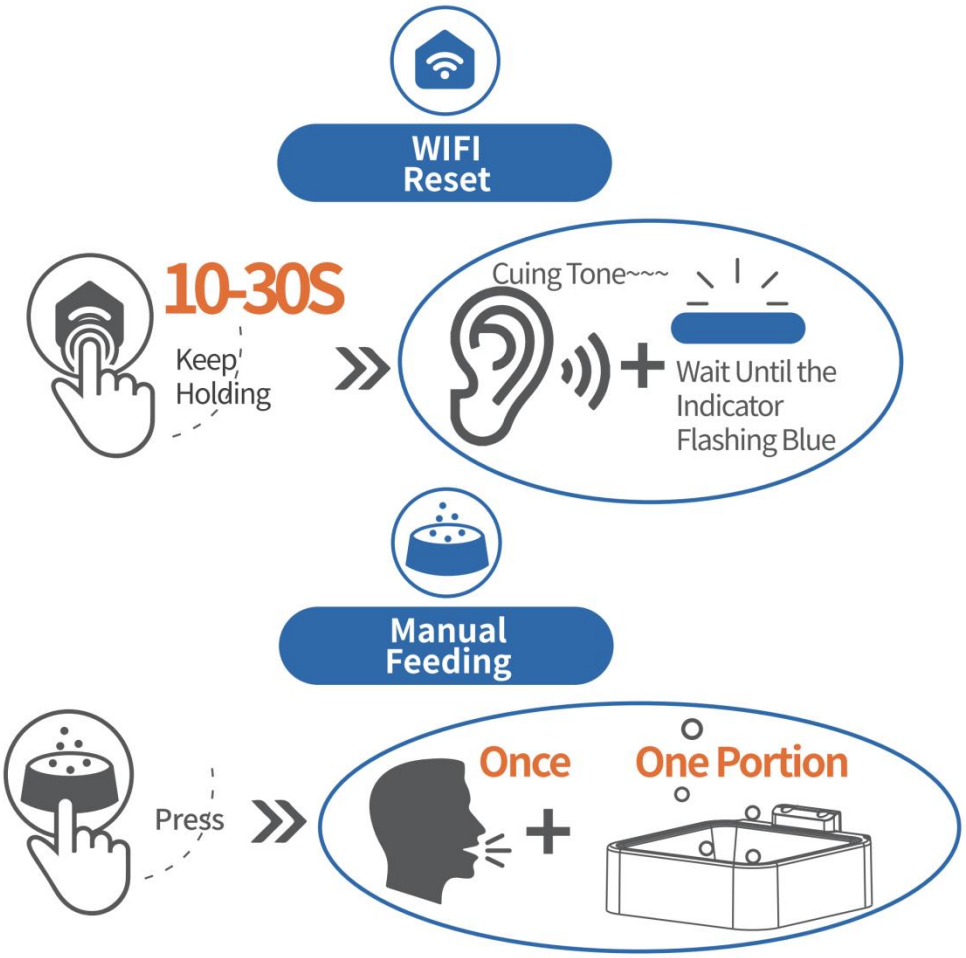

Indicator Description

Indicator	Status
Blue Light Blinking	WiFi Pending Connection
Blue Light	WiFi Connected
Red Light	Low Battery (Battery-powered Only)

▲Note:
After the blue light starts flashing, please finish connecting your phone to the device within five minutes, otherwise the blue light will go out. If the time is exceeded, please reset it by pressing and hold the WiFI Reset Button for 15 seconds.

Tutorial Video

You can scan the **Tutorial Video** QR code to watch how to connect.

Tutorial Video

Install the APP & Log In

App Installation

Download and install the "Smart Life" App by scanning the QR code, or searching it on Google Play (Android)/ App Store (ios).

Smart Life

Sign up and log in

After opening the app, if you don't have an account, please register one. If you have already have, please log in directly.

Add the Device



▲Note:
1. Make sure you have already turned the bluetooth and WiFi on before you try to connect the device.
2. One device can be attached to only one account at a time, but when you share your control in the app, the device can be controlled by multiple phones.

Add and Connect the Feeder

1




Connect and turn the power on




When hearing the prompt tone and the indicator is blinking blue, it means the device is ready to connect WiFi.

▲Note:
If the indicator is not blinking blue, please long press the button for 15 seconds to reset the device.


2 Please open the Smart Life APP → Tap the [+] in the upper right corner to add the device.

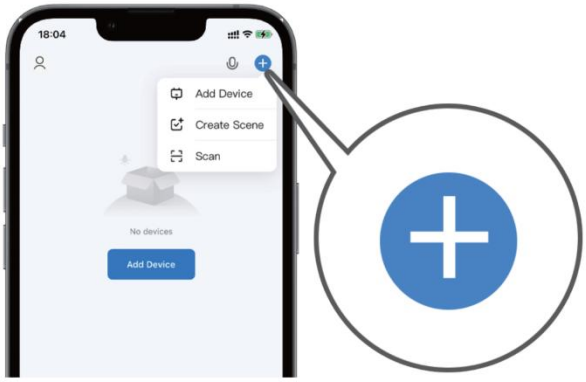

3 The feeder enters the pending connection state (the indicator light flashing blue), please follow the app prompts to operate.

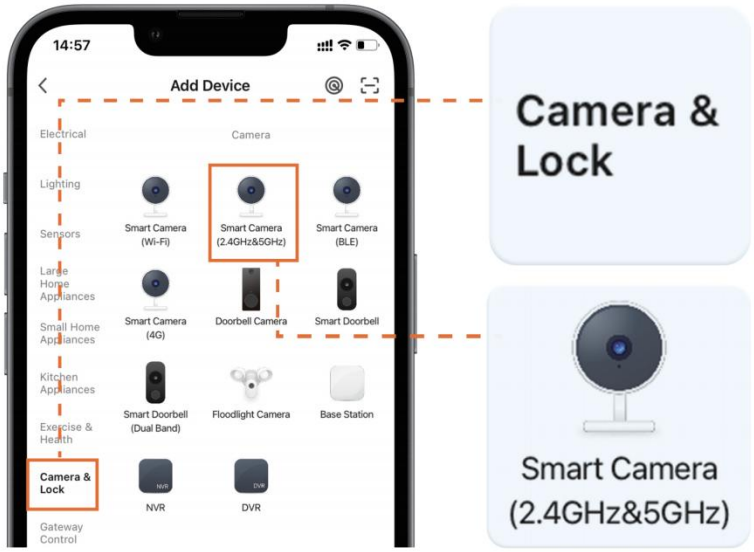



Method One

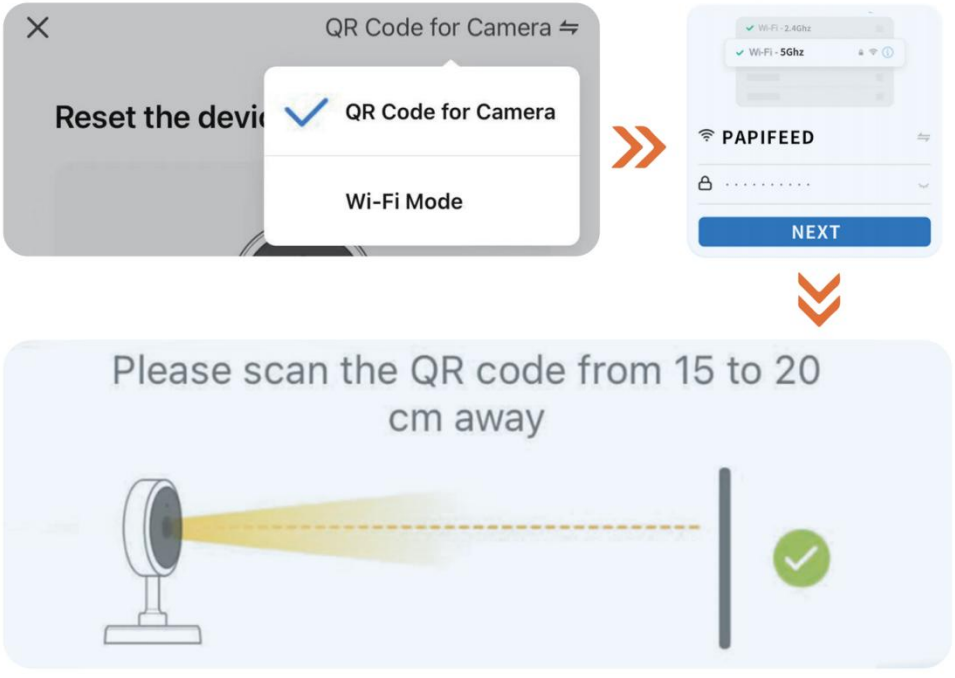

▲Note:
The mobile phone QR code needs to be aligned with the camera and kept at a distance of 6-8in, moving back and forth from far to near to scan the QR code.


Method Two

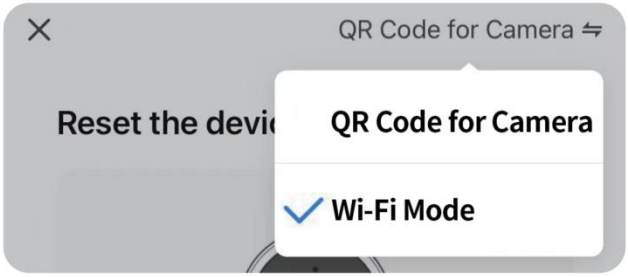

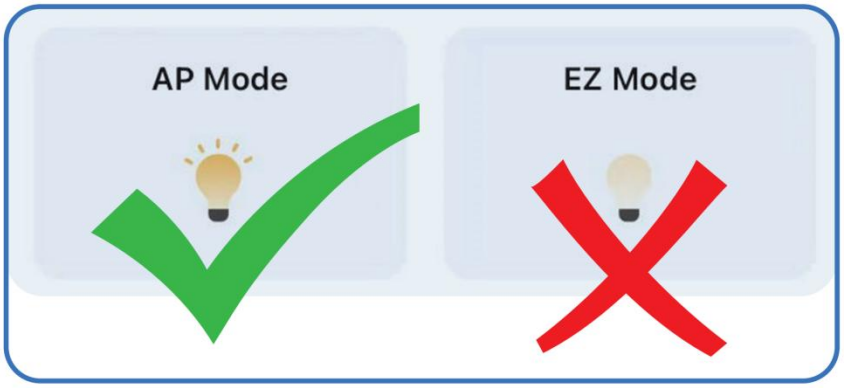



About the Camera

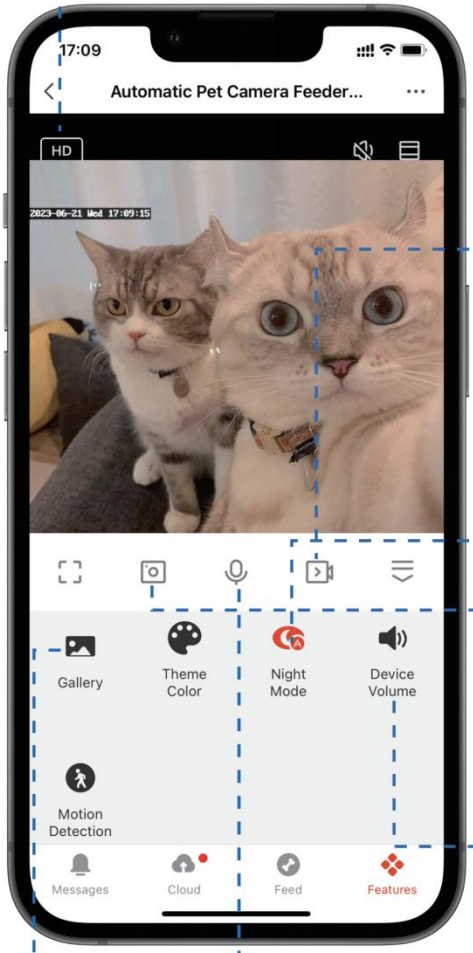

SD/HD:
Standard Definition/High Definition, the default video quality is HD(high definition), tap SD or HD to select your preferred video quality

Video:
Tap to start recording a video clip, tap again to end. Video clips are automatically saved inthe Album section of the APP


Night Mode: ON/OFF

Screenshots:
Tap to take a screenshot of thereal-time screen. Screenshots are automatically saved in the Album section of the APP

Device Volume:
Adjust the volume level of the sound which emitted by device (e.g. recordings volume and two-way talk volume)

Gallery:
Tap to check the screenshots and video clips

Vioce Calls
- One-Way Communication
- Two-Way Talk

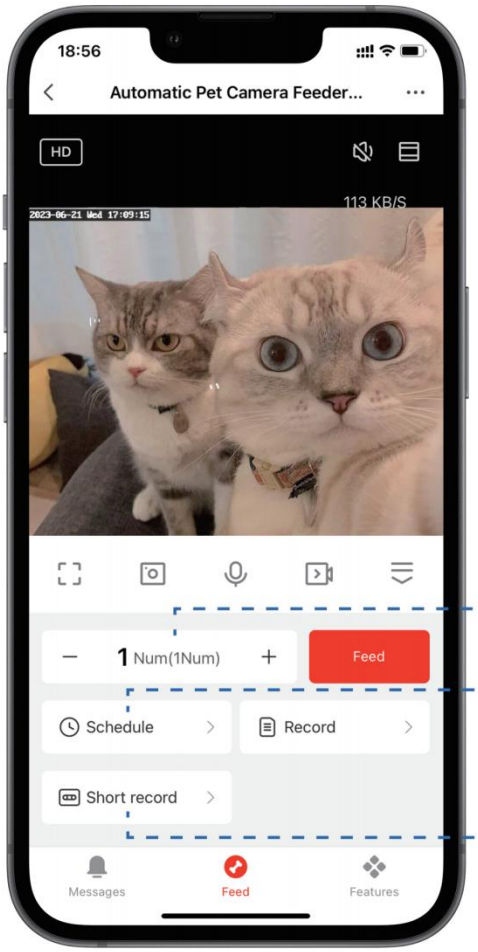


Number of Servings:
Maximum 20 servings

Schedule:
Up to 15 feeding schedules can be set

Short Record:
To start recording your vioce

▲Note:
Please note that short record on the app need to be tapped and then recorded in front of the device. If you are too far apart, you will not be able to record your voice successfully.

Switch the Mode

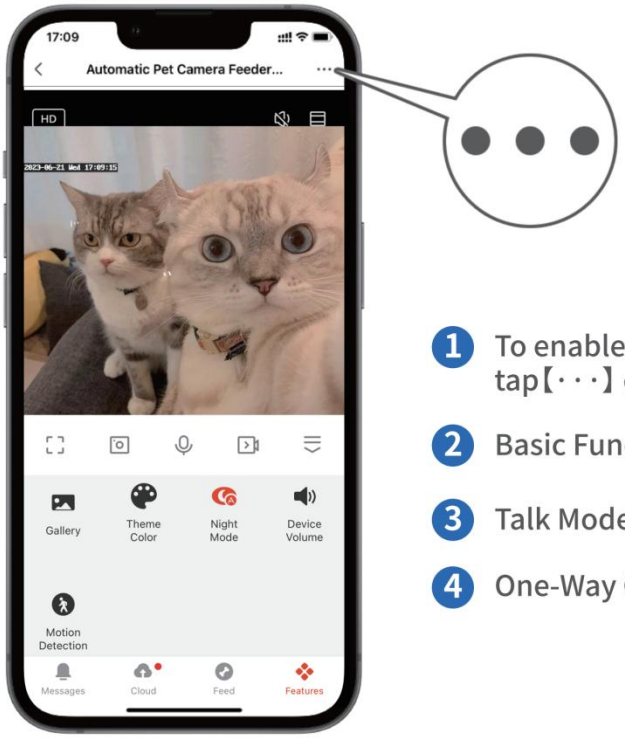

1. To enable the Two-Way Talk function, tap【· · ·】on the upper right
2. Basic Function Settings
3. Talk Mode
4. One-Way Communication

One-Way Communication (Default Mode):



Hold the talk button to speak, release the button to end the talk. You can't hear the other side when you are talking.


Two-Way Talk:




Tap the button to speak, the pet or people on the other side can hear you and talk with you. Tap again to end the talk. It ensures seamless communication between the two sides.

Cleaning & Care

We recommend to clean the feeder regularly for the health of your pet. The washable parts of the feeder are as follows: safety lock, lid, desiccant compartment, food tank, stainless steel feeding bowl, bowl tray.

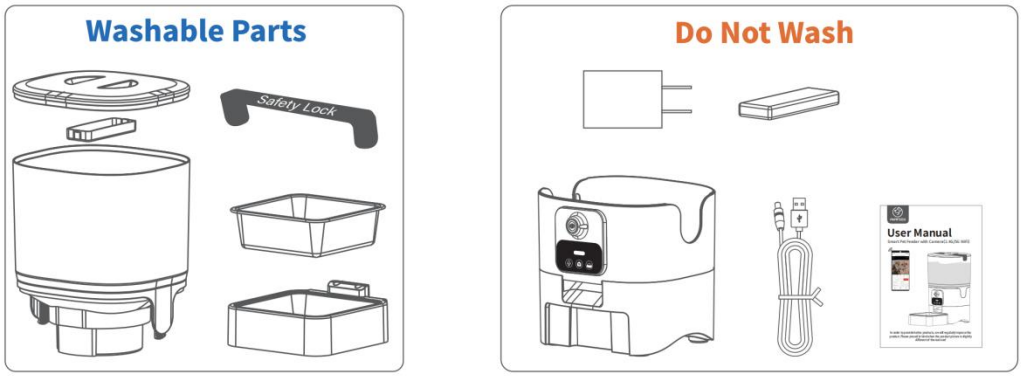

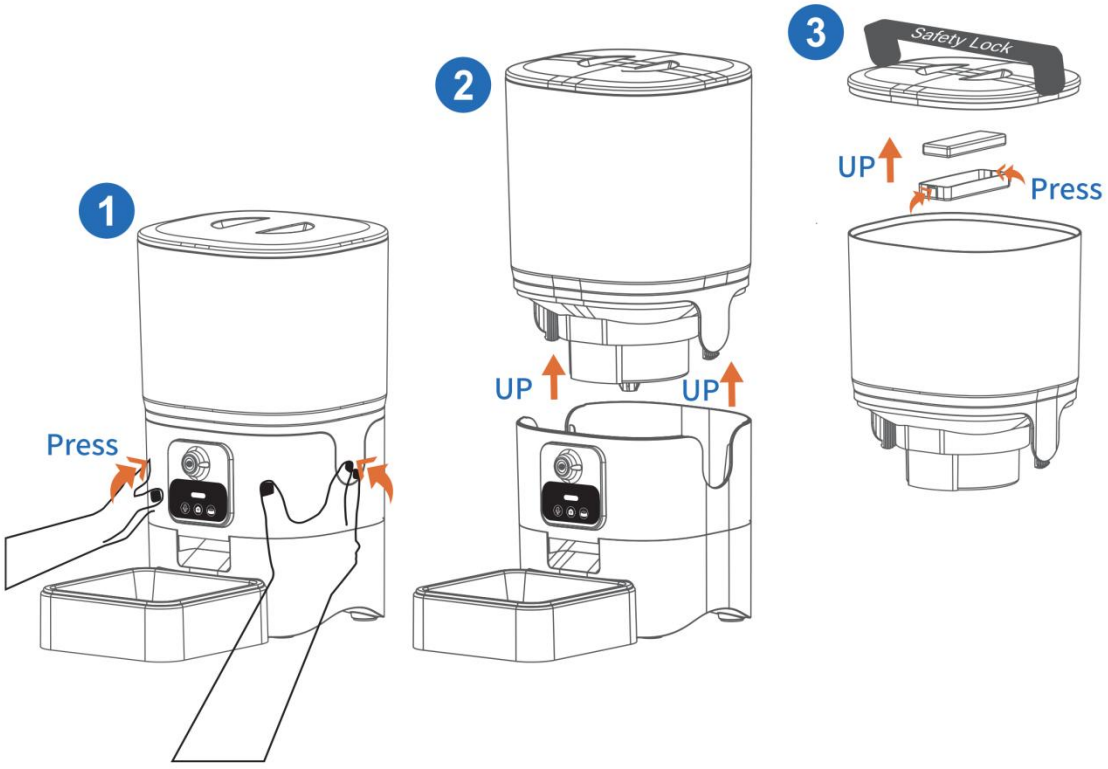


FAQ

Problem	Solution
Can't connect the feeder to WiFi	1) Keep the feeder and your phone close to your router, make sure the network signal is good.
	2) Reset the feeder and reconnect.
	3) Follow the APP's instructions or our tutorial videos to add the feeder. There are more than one adding methods to choose from.
	4) Contact our after-sales team via email for help.
WiFi connection is sporadic	1) Keep the feeder close to your router, make sure the network signal is good, it is ideal to make it within 5 meters without obstacles and walls. (Depending on the coverage of the router you are using).
	2) Make sure the power cord is properly at this point.
	3) Reset the feeder and reconnect.
The indicators are off	1) Check whether the electricity is cut off.
	2) Check whether the indicator function is off on the App.
The feeder's camera can't read the QR code on your phone	1) Make sure the feeder is ready for network connection, that is, the WiFi indicator on the feeder is flashing.
	2) Hold your phone about 6-8 inches a way from the feeder's camera. Remove the food bowl and tilt the feeder as needed.

Problem	Solution
Live video not showing	1) Switch to stronger WiFi signal.
	2) lf the network is poor, change the video quality from HD (high definition) to SD (standard definition).
Where are the photos and videos stored?	1) The screenshots and video clips are stored in the Album section of the APP.
	2) The video playbacks are stored in the Replay section of the APP.

Reference for Meal & Portion Settings

▲Note:
1. Below is the recommended amount of food your pet needs by each meal.
2. One portion of this feeder is about 15g/0.03lb.

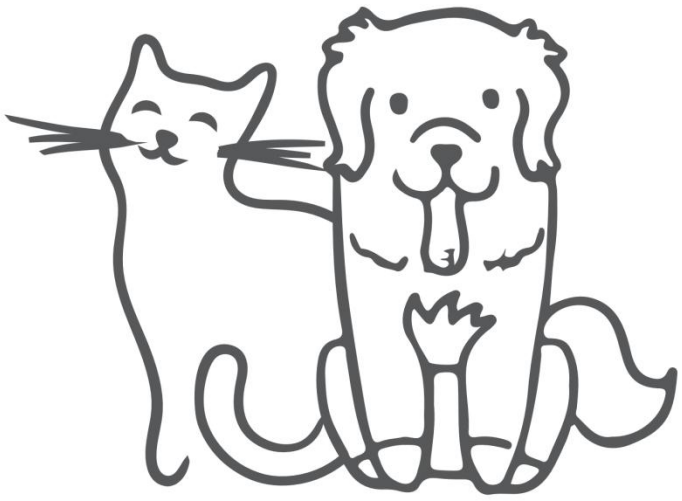

If the pet fail to eat up the previous programmde meal, please reduce the next meal portion.

- CAT -

Age (Months)	1-2	2-4	4-6	6-8	8-12
Suggested Feed	20-30g	30-50g	50-70g	70-80g	80-90g
Weight (Months)	2-3kg	3-5kg	5-7kg	Pregnancy	Lactation Period
Suggested Feed	25-35g	35-55g	55-35g	70-110g	120-190g

- DOG -

Dog Weight	Normal Activity	Increased Activity		Dog weight	Normal Activity	Increased Activity	Vigorous Activity
2kg	39g	45g		22kg	250g	290g	329g
4kg	66g	76g		24kg	267g	309g	351g
6kg	89g	104g		26kg	274g	318g	361g
8kg	111g	128g		28kg	290g	336g	381g
10kg	131g	152g		30kg	305g	353g	402g
12kg	150g	174g		32kg	320g	371g	422g
14kg	178g	206g	235g	34kg	335g	388g	441g
16kg	197g	228g	259g	36kg	350g	405g	461g
18kg	197g	228g	259g	38kg	364g	422g	480g
20kg	233g	270g	307g	40kg	379g	439g	496g

100% After Sales Service

We provide one year warranty for this appliance.

Please email our support team at **[service@papifeed.cn]**, if you have any questions, attach your order number and describe the problem you met in your email. We will get back to you within 24 hours.

Also you can call us at **(1) 877-290-0617**

(From Monday to Friday: 8 a.m.-5 p.m.)(PST)